

Product Code


**4412/17B**

Solid Core Drier Shell

2.1/8"-54mm ODS

PS = 45 bar - 470 PSI

CLASSIC

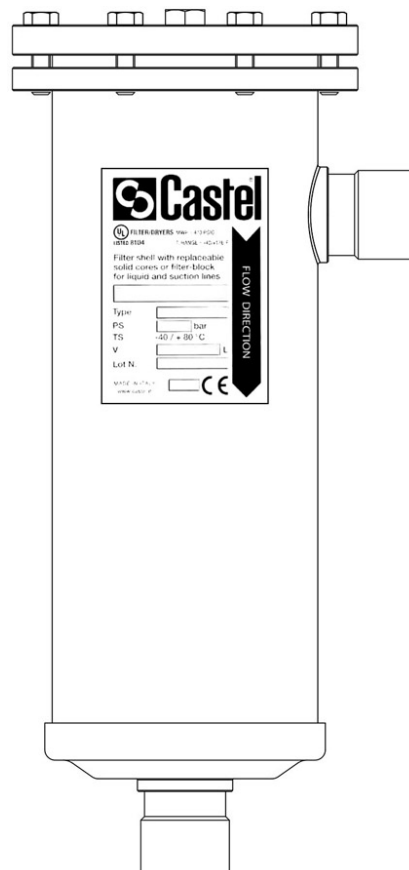

## Product use

Dryers for the liquid line that allow the replacement of the dryer elements, so-called cartridges.

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

## Product details

|                         |                                          |
|-------------------------|------------------------------------------|
| Attacchi ODS Ø [in.]    | 2.1/8"                                   |
| Attacchi ODS Ø [mm]     | 54                                       |
| Tipo cartucce           | 4490/A4490/B4490/AA4490/AB4490/BA4490/BB |
| N° cartucce             | 2                                        |
| Cubatura nominale [cm³] | 1600                                     |
| PS[bar]                 | 45                                       |
| MWP [psi] (1)           | 470                                      |
| TS[°C] min.             | -40                                      |
| TS[°C] max.             | +80                                      |
| Confezione n° pz        | 1                                        |

# Notes

(1): in conformità a omologazione UL