

Product Code

4413/7AF

Solid Core Drier Shell
7/8"-22mm ODS
PS = 45 bar - 470 PSI


Product use

Dryers for the liquid line that allow the replacement of the dryer elements, so-called cartridges.
Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:
HCFC (R22)
HFC (R134a, R404A, R407C, R410A, R507)
HFO (R1234ze)
HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

Product details

N° Catalogo Coperchio filettato 4413/7AF

Connections ODS Ø [in.]	7/8"
Connections ODS Ø [mm]	22
W Ø [mm]	26,9
Tipo cartucce	4490/A4490/B4490/AA4490/AB4490/BA4490/BB
N° cartucce	3
Cubatura nominale [cm³]	2400
PS[bar]	45
MWP [psi] (1)	470
TS[°C] min.	-40
TS[°C] max.	+80
Confezione n° pz	1

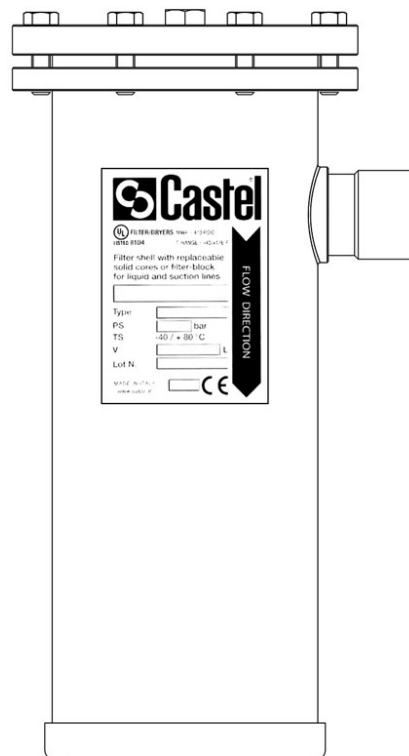

Notes

(1): in conformità a omologazione UL