

Product Code

4414/17AF

Solid Core Drier Shell

2.1/8"-54mm ODS

PS = 35 bar - 470 PSI

Product use

Dryers for the liquid line that allow the replacement of the dryer elements, so-called cartridges.


Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

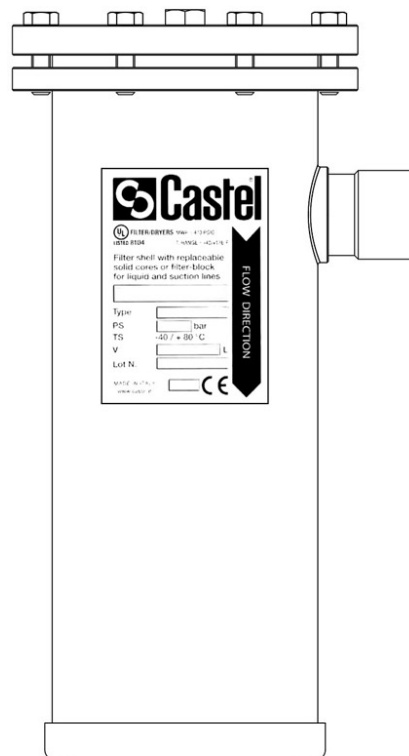

Product details

N° Catalogo Coperchio filettato 4414/17AF

Connections ODS Ø [in.]	2.1/8"
Connections ODS Ø [mm]	54
W Ø [mm]	60,3
Tipo cartucce	4490/A4490/B4490/AA4490/AB4490/BA4490/BB
N° cartucce	4
Cubatura nominale [cm³]	3200
PS[bar]	35
MWP [psi] (1)	470
TS[°C] min.	-40
TS[°C] max.	+80
Confezione n° pz	1

Notes

(1): in conformità a omologazione UL