

Product Code

4423/17A

Solid Core Drier Shell
2.1/8"-54mm ODS - 60,3W
PS = 32 bar - 470 PSI

Product use

Dryers for the liquid line that allow the replacement of the dryer elements, so-called cartridges.

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)


HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

Product details

N° Catalogo Coperchio filettato 4423/17A

Connections ODS Ø [in.]	2.1/8"
Connections ODS Ø [mm]	54
W Ø [mm]	60,3
Tipo cartucce	4491/A4491/AA
N° cartucce	3
Cubatura nominale [cm³]	4800
PS[bar]	32
MWP [psi] (1)	470
TS[°C] min.	-40
TS[°C] max.	+80
Confezione n° pz	1

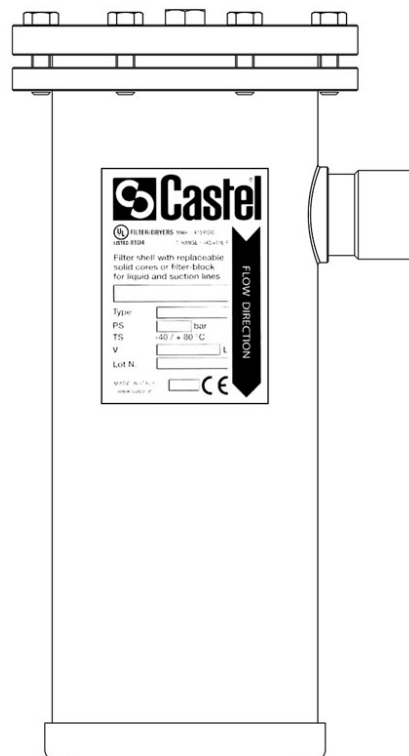

Notes

(1): in conformità a omologazione UL