


Product Code

9150N/R64

Orifice Assemblies
02x2028

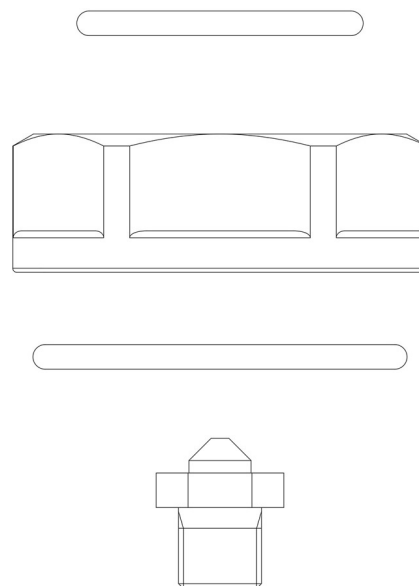

Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

- HFC (R134A, R32, R404A, R407C, R410A, R507)
- HFO (R1234YF, R1234ZE)
- HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)
- HC (R290, R600, R600A, R1270)

These valves are only sold in the model without the coil (S suffix), with 9 nozzles assembled for an increasing output from 1 to 22 kW with R410A.

Product details

Tipo orificio 02

Potenzialità nominali (1) [kW] R1 1,57

Potenzialità nominali (1) [kW] R2 3,48

R404A 1,46

R507 1,46

R407C 2,04

R410A 2,40

R1234ze 1,23

R1234yf 1,16

R448A 1,96

R449A 1,92

R450A 1,38

R452A	1,52
R452B	2,71
R454A	1,98
R454B	2,73
R454C	1,69
R513A	1,33
R515A	1,19
R515B	1,18
R290	2,11
R600	1,34
R600a	1,39
R1270	2,37
Confezione n° pz	180

Notes

(1) Le potenzialità nominali sono riferite a:

- Temperatura d'evaporazione $T_{\text{evap}} = + 5 \text{ }^{\circ}\text{C}$
- Temperatura di condensazione $T_{\text{cond}} = + 32 \text{ }^{\circ}\text{C}$
- Temperatura del liquido all'ingresso della valvola $T_{\text{liq}} = + 28 \text{ }^{\circ}\text{C}$