


Product Code

9150N/R69

Orifice Assemblies
07x2028

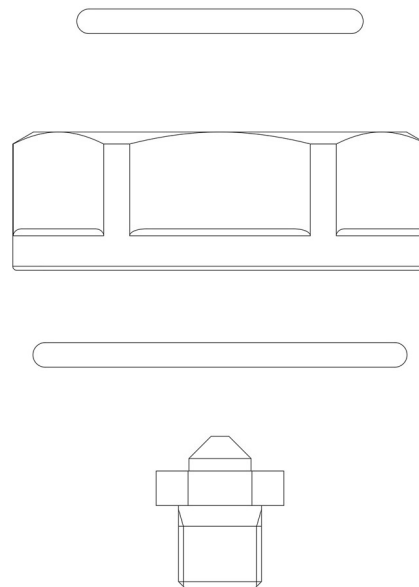

Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

- HFC (R134A, R32, R404A, R407C, R410A, R507)
- HFO (R1234YF, R1234ZE)
- HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)
- HC (R290, R600, R600A, R1270)

These valves are only sold in the model without the coil (S suffix), with 9 nozzles assembled for an increasing output from 1 to 22 kW with R410A.

Product details

Tipo orificio 07

Potenzialità nominali (1) [kW] R1 11,26

Potenzialità nominali (1) [kW] R2 24,98

R404A 10,51

R507 10,51

R407C 14,66

R410A 17,22

R1234ze 8,84

R1234yf 8,30

R448A 14,03

R449A 13,77

R450A 9,88

R452A	10,88
R452B	19,42
R454A	14,21
R454B	19,61
R454C	12,13
R513A	9,55
R515A	8,51
R515B	8,47
R290	15,17
R600	9,63
R600a	9,95
R1270	16,98
Confezione n° pz	180

Notes

(1) Le potenzialità nominali sono riferite a:

- Temperatura d'evaporazione $T_{\text{evap}} = + 5 \text{ }^{\circ}\text{C}$
- Temperatura di condensazione $T_{\text{cond}} = + 32 \text{ }^{\circ}\text{C}$
- Temperatura del liquido all'ingresso della valvola $T_{\text{liq}} = + 28 \text{ }^{\circ}\text{C}$