


## Product Code

# 1358N/5S165

Solenoid Valve  
5/8"-16 mm ODS w/o Coil  
PS = 50 bar

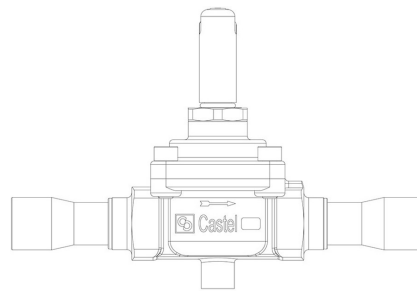

**P**  **LYHEDRA**

### Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:  
HFC (R134A, R32, R404A, R407C, R410A, R507)  
HFO (R1234YF, R1234ZE)  
HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)  
HC (R290, R600, R600A, R1270)

These valves are sold in both the version without the coil (S suffix) and the version with the coil (A6 suffix for coils at 220 VAC).

### Product details

<b>Principio di funzionamento</b>	Servocomando a pistone
<b>Tipo Bobina (1)</b>	HF2HF3HF4HM2HM3HM4CM2
<b>Attacchi ODS Ø [in.]</b>	5/8"
<b>Attacchi ODS Ø [mm]</b>	16
<b>Kv [m³/h]</b>	3,8
<b>PS [bar]</b>	50
<b>TS [°C] (2) min.</b>	-40
<b>TS [°C] (2) max.</b>	+150
<b>Confezione n° pz</b>	14

## Notes

(#): per by-pass gas caldo, iniezione di liquido, linea dell'olio

(1) : bobine che possono essere montate sulle valvole

(2) : per impiego su linea dell'olio TS = -10 /+70 °C