


## Product Code

# DB330/5S

Solid Core Bi-Flow Filter Drier

5/8" ODS

PS = 50 bar - 680 PSI

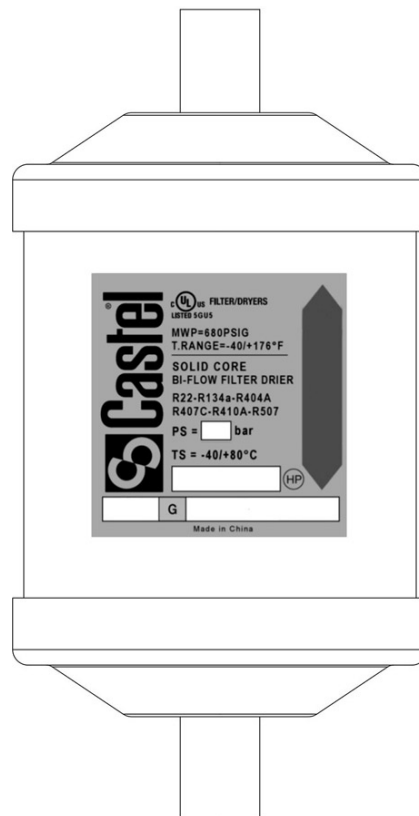

## Product use

Bi-flow hermetic filter dryers are designed to be installed on the liquid line of reverse cycle air conditioning systems and heat pumps.

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HFCF (R22)

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

## Product details

Dibujo img(DB316\_5S.jpg)

N° catálogo DB330/5S

Código internacional 305S

Conexiones ODS Ø [in.] 5/8"

Conexiones ODS Ø [mm] 16

Cubicación nominal [cm<sup>3</sup>] 500

PS [bar] 50

<b>MWP [psi] (1)</b>	680
<b>TS [°C] min.</b>	-40
<b>TS [°C] max.</b>	+80
<b>Paquete de n° piezas</b>	10

## Notes

(1): en conformidad con la homologación UL