


## Product Code

# 1020/2S

Solenoid Valve  
1/4"Flare w/o Coil  
PS = 45 bar

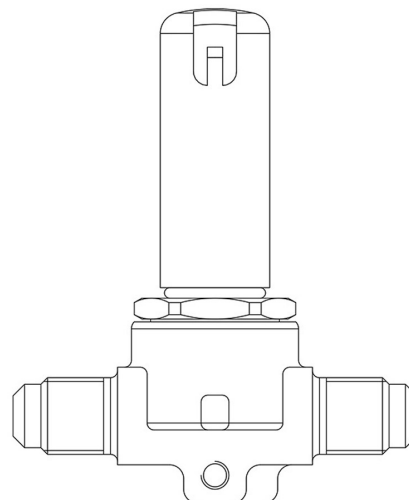

CLASSIC

### Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

These valves are sold in both the version without the coil (S suffix) and the version with the coil (A6 suffix for coils at 220 VAC and A7 suffix for coils at 240 VAC).

### Product details

|                      |                       |
|----------------------|-----------------------|
| Funtionsprinzip      | Direkte Aktion        |
| Spulentyp (1)        | HF2HF3HF4HM2HM3HM4CM2 |
| Anschlüsse SAE Flare | 1/4"                  |
| Kv [m³/h]            | 0,175                 |
| PS [bar]             | 45                    |
| TS [°C] min.         | -35                   |
| TS [°C] max.         | +110                  |
| Verpackung           | 18                    |

## Notes

(1) : Spulen, die an den Ventilen montiert werden können