


# Product Code

## 4424/25A

Solid Core Drier Shell  
3.1/8"-80mm ODS - 88,9W  
PS = 32 bar - 470 PSI

### Product use

Dryers for the liquid line that allow the replacement of the dryer elements, so-called cartridges.  
Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:  
HCFC (R22)  
HFC (R134a, R404A, R407C, R410A, R507)  
HFO (R1234ze)  
HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

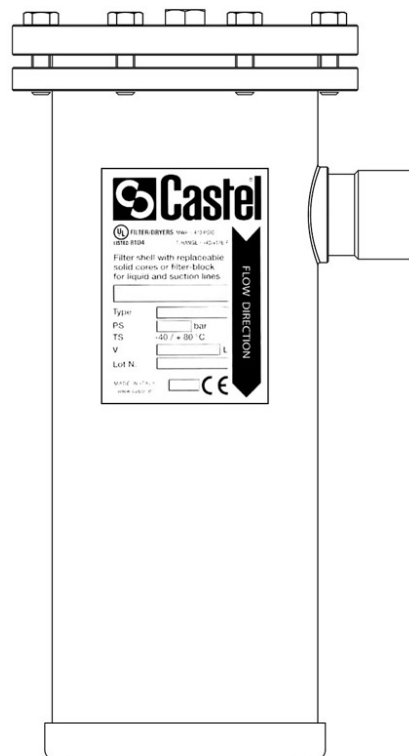

### Product details

Desenho img(4411\_5AF.jpg)

N° catálogo Cobertura roscada 4424/25A

Conexões ODS Ø [in.] 3.1/8"

Conexões ODS Ø [mm] 80

W Ø [mm] 88,9

Tipo de cartucho 4491/A4491/AA

N° cartucho 4

Cubo nominal [cm³] 6400

PS[bar] 32

MWP [psi] (1) 470

TS[°C] min. -40

TS[°C] max. +80

Embalagem 1

## Notes

(1): em conformidade com a aprovação UL