


Product Code

DB316/3S

Solid Core Bi-Flow Filter Drier
3/8"ODS
PS = 50 bar - 680 PSI

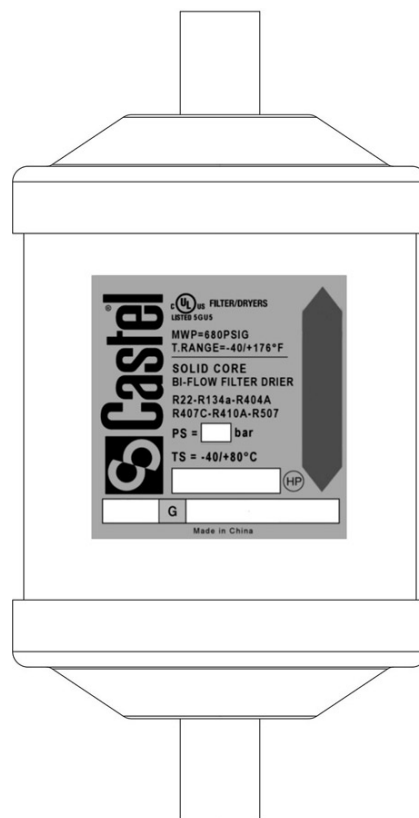

Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:
HCFC (R22)
HFC (R134a, R404A, R407C, R410A, R507)
HFO (R1234ze)
HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)
HC (R290, R600, R600a, R1270)

Product details

Desenho img(DB316_5S.jpg)

N° catálogo DB316/3S

Código internacional 163S

Conexões ODS Ø [in.] 3/8"

Conexões ODS Ø [mm] -

Cubo nominal [cm³] 250

PS[bar] 50

MWP [psi] (1) 680

TS[°C] min. -40

TS[°C] max. +80

Castel non si assume alcuna responsabilità per eventuali errori nei cataloghi, opuscoli e altro materiale stampato o indicato nel sito Castel.it. Castel si riserva il diritto di modificare i propri prodotti senza preavviso. Tutti i marchi in questo materiale sono di proprietà di Castel. Tutti i diritti riservati.

Castel assumes no responsibility for any errors in catalogs, brochures and other material printed or indicated on the Castel.it website. Castel reserves the right to modify its products without notice. All trademarks in this material are the property of Castel. All rights reserved.

Notes

(1): em conformidade com a aprovação UL