


Product Code

9150/R68

Orifice Assemblies
06x2028

CLASSIC

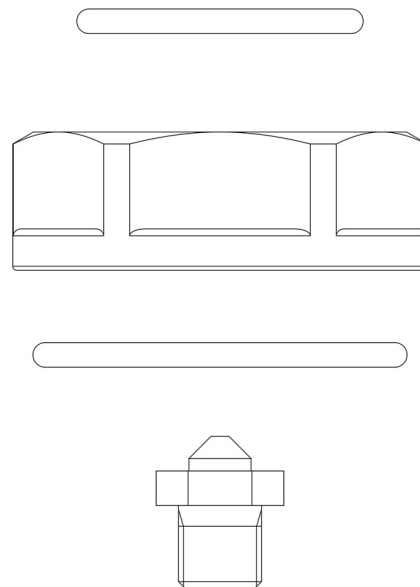

Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

These valves are only sold in the model without the coil (S suffix), with 9 nozzles assembled for an increasing output from 1 to 22 kW with R410A.

Product details

Desenho img(9150_R63.jpg)

N° catálogo 9150/R68

Tipo de furo 06

Potências nominais (1) [kW] R13 7,14

Potências nominais (1) [kW] R22 9,10

R404A 6,66

R507 6,66

R407C 9,30

R410A 10,92

R1234ze 5,61

Castel non si assume alcuna responsabilità per eventuali errori nei cataloghi, opuscoli e altro materiale stampato o indicato nel sito Castel.it. Castel si riserva il diritto di modificare i propri prodotti senza preavviso. Tutti i marchi in questo materiale sono di proprietà di Castel. Tutti i diritti riservati.

Castel assumes no responsibility for any errors in catalogs, brochures and other material printed or indicated on the Castel.it website. Castel reserves the right to modify its products without notice. All trademarks in this material are the property of Castel. All rights reserved.

R448A	8,90
R449A	8,73
R450A	6,27
R452A	6,90
R513A	6,06
R515A	5,39
R515B	5,37
Embalagem	180

Notes

(1) As potencialidades nominais são referidas a:

- Temperatura de evaporação $T_{\text{evap}} = + 5 \text{ }^{\circ}\text{C}$
- Temperatura de condensação $T_{\text{cond}} = + 32 \text{ }^{\circ}\text{C}$
- Temperatura do líquido na entrada da válvula $T_{\text{liq}} = + 28 \text{ }^{\circ}\text{C}$