


Product Code

9150/R69

Orifice Assemblies
07x2028

CLASSIC

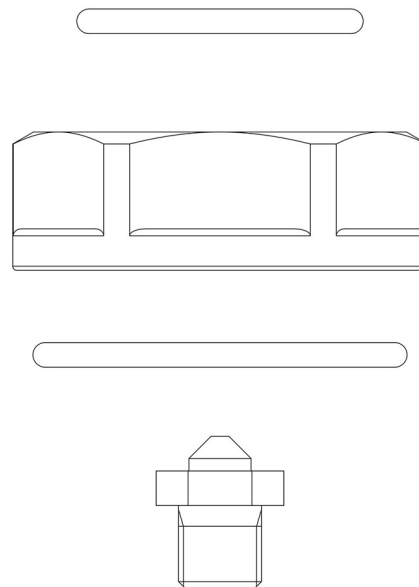

Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

These valves are only sold in the model without the coil (S suffix), with 9 nozzles assembled for an increasing output from 1 to 22 kW with R410A.

Product details

Desenho img(9150_R63.jpg)

N° catálogo 9150/R69

Tipo de furo 07

Potências nominais (1) [kW] R13 11,26

Potências nominais (1) [kW] R22 14,35

R404A 10,51

R507 10,51

R407C 14,66

R410A 17,22

R1234ze 8,84

Castel non si assume alcuna responsabilità per eventuali errori nei cataloghi, opuscoli e altro materiale stampato o indicato nel sito Castel.it. Castel si riserva il diritto di modificare i propri prodotti senza preavviso. Tutti i marchi in questo materiale sono di proprietà di Castel. Tutti i diritti riservati.

Castel assumes no responsibility for any errors in catalogs, brochures and other material printed or indicated on the Castel.it website. Castel reserves the right to modify its products without notice. All trademarks in this material are the property of Castel. All rights reserved.

R448A	14,03
R449A	13,77
R450A	9,88
R452A	10,88
R513A	9,55
R515A	8,51
R515B	8,47
Embalagem	180

Notes

(1) As potencialidades nominais são referidas a:

- Temperatura de evaporação $T_{\text{evap}} = + 5 \text{ }^{\circ}\text{C}$
- Temperatura de condensação $T_{\text{cond}} = + 32 \text{ }^{\circ}\text{C}$
- Temperatura do líquido na entrada da válvula $T_{\text{liq}} = + 28 \text{ }^{\circ}\text{C}$