


Product Code

9150N/R69

Orifice Assemblies
07x2028

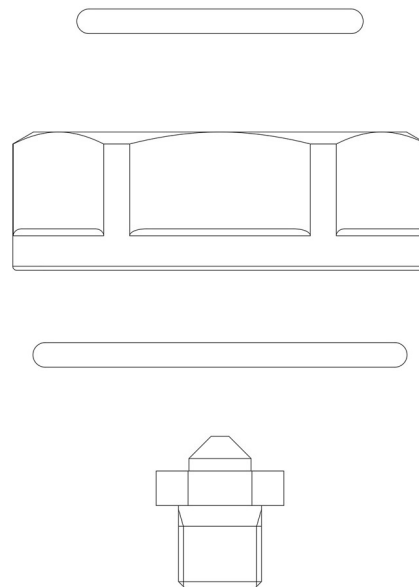

Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

- HFC (R134A, R32, R404A, R407C, R410A, R507)
- HFO (R1234YF, R1234ZE)
- HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)
- HC (R290, R600, R600A, R1270)

These valves are only sold in the model without the coil (S suffix), with 9 nozzles assembled for an increasing output from 1 to 22 kW with R410A.

Product details

Desenho img(9150N_R63.jpg)

N° catálogo 9150N/R69

Tipo de furo 07

Potências nominais (1) [kW] R12 11,26

Potências nominais (1) [kW] R32 24,98

R404A 10,51

R507 10,51

R407C 14,66

R410A 17,22

R1234ze 8,84

R1234yf 8,30

R448A 14,03

R449A	13,77
R450A	9,88
R452A	10,88
R452B	19,42
R454A	14,21
R454B	19,61
R454C	12,13
R513A	9,55
R515A	8,51
R515B	8,47
R290	15,17
R600	9,63
R600a	9,95
R1270	16,98
Embalagem	180

Notes

(1) As potencialidades nominais são referidas a:

- Temperatura de evaporação $T_{\text{evap}} = + 5 \text{ }^{\circ}\text{C}$
- Temperatura de condensação $T_{\text{cond}} = + 32 \text{ }^{\circ}\text{C}$
- Temperatura do líquido na entrada da válvula $T_{\text{liq}} = + 28 \text{ }^{\circ}\text{C}$