


Product Code

1338N/3S065

Pulse Solenoid Valve

3/8"ODS w/o Coil

PS = 50 bar

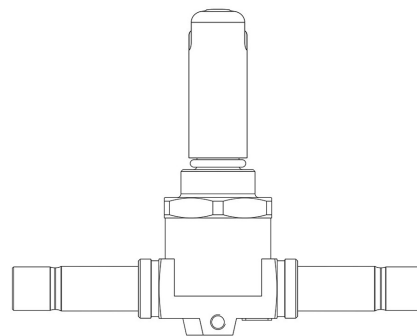

Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

These valves are sold in both the version without the coil (S suffix) and the version with the coil (A6 suffix for coils at 220 VAC).

Product details

Princípio de funcionamento Servocomando com pistão

Desenho img(1338N_3S.jpg)

N° catálogo 1338N/3S065

Tipo de Bobina (1) HF2HF3HF4HM2HM3HM4CM2

Ligações ODS Ø [in.] 3/8"

Ligações ODS Ø [mm] -

Kv [m³/h] 1

PS [bar] 50

TS [°C] (2) min. -40

Castel non si assume alcuna responsabilità per eventuali errori nei cataloghi, opuscoli e altro materiale stampato o indicato nel sito Castel.it. Castel si riserva il diritto di modificare i propri prodotti senza preavviso. Tutti i marchi in questo materiale sono di proprietà di Castel. Tutti i diritti riservati.

Castel assumes no responsibility for any errors in catalogs, brochures and other material printed or indicated on the Castel.it website. Castel reserves the right to modify its products without notice. All trademarks in this material are the property of Castel. All rights reserved.

TS [°C] (2) max.	+150
Embalagem	24

Notes

(#) : para by-pass de gás quente, de injeção de líquido, linha de óleo

(1) : bobinas que podem ser montadas nas válvulas

(2) : para uso na linha de óleo TS = -10 /+ 70 ° C