


Product Code

1358N/7S165

Solenoid Valve
7/8"-22mm ODS w/o Coil
PS = 50 bar

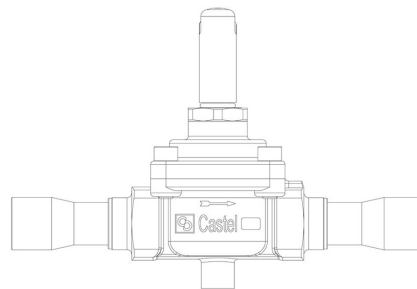

POLYHEDRA

Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:
HFC (R134A, R32, R404A, R407C, R410A, R507)
HFO (R1234YF, R1234ZE)
HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)
HC (R290, R600, R600A, R1270)

These valves are sold in both the version without the coil (S suffix) and the version with the coil (A6 suffix for coils at 220 VAC).

Product details

Princípio de funcionamento Servocomando com pistão

Desenho img(1358N_5S.jpg)

N° catálogo 1358N/7S165

Tipo de Bobina (1) HF2HF3HF4HM2HM3HM4CM2

Ligações ODS Ø [in.] 7/8"

Ligações ODS Ø [mm] 22

Kv [m³/h] 5,7

PS [bar] 50

TS [°C] (2) min. -40

TS [°C] (2) max.	+150
Embalagem	14

Notes

(#) : para by-pass de gás quente, de injeção de líquido, linha de óleo

(1) : bobinas que podem ser montadas nas válvulas

(2) : para uso na linha de óleo TS = -10 /+ 70 ° C