


Product Code

**5650/RA2**

Electronic Oil Level Regulator

24 VAC - 50/60 Hz

PS = 50 bar

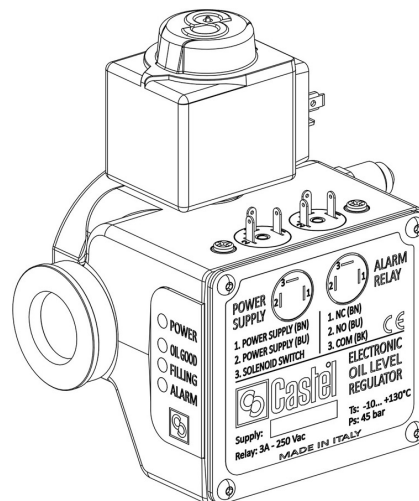

**POLYHEDRA**

## Product use

The oil level regulators ensure monitoring and control of the oil level in the crankcases of both alternative reciprocating and scroll compressors. Specifically, these regulators are employed to resolve the problem of incorrect oil distribution in multiple compressor plants.

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HCFC (R22)

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

## Product details

Desenho 

N° catálogo 5650/RA2

Conexões Adaptadores do cárte 5690/X115690/X125690/X135690/X145690/X155690/X17

Conexões Indicador de nível de 1 indicadores

Entrada de óleo SAE Flare 3/8"

Versão Direita

Tensão [V] 24 AC

Frequência [Hz] 50/60

Grau de proteção IP 65

|              |          |
|--------------|----------|
| Kit cavi (1) | 9901/X26 |
| PS [bar]     | 50       |
| TS [°C] min. | -30      |
| TS [°C] max. | +130     |
| Embalagem    | 4        |

Notes

(1) A ser solicitado separadamente