


Product Code

9151N/R61

Orifice Assemblies
00x2028N

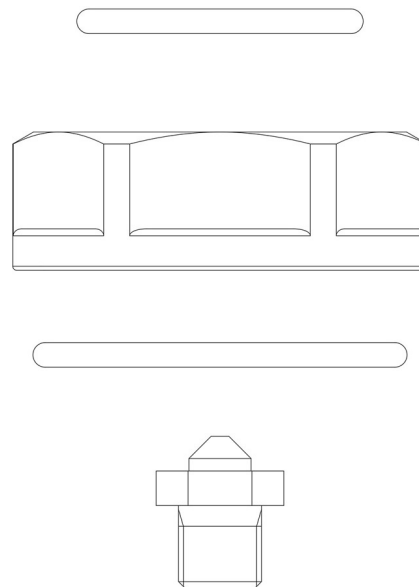

Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

- HFC (R134A, R32, R404A, R407C, R410A, R507)
- HFO (R1234YF, R1234ZE)
- HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)
- HC (R290, R600, R600A, R1270)

These valves are only sold in the model without the coil (S suffix), with 9 nozzles assembled for an increasing output from 1 to 22 kW with R410A.

Product details

Desenho img(9150N_R63.jpg)

N° catálogo 9151N/R61

Tipo de furo 00

Potências nominais (1) [kW] R12 0,22

Potências nominais (1) [kW] R32 0,49

R404A 0,21

R507 0,21

R407C 0,29

R410A 0,34

R1234ze 0,17

R1234yf 0,16

R448A 0,27

R449A	0,27
R450A	0,19
R452A	0,21
R452B	0,38
R454A	0,28
R454B	0,38
R454C	0,24
R513A	0,19
R515A	0,17
R515B	0,17
R290	0,30
R600	0,19
R600a	0,19
R1270	0,33
Embalagem	180

Notes

(1) As potencialidades nominais são referidas a:

- Temperatura de evaporação $T_{\text{evap}} = + 5 \text{ }^{\circ}\text{C}$
- Temperatura de condensação $T_{\text{cond}} = + 32 \text{ }^{\circ}\text{C}$
- Temperatura do líquido na entrada da válvula $T_{\text{liq}} = + 28 \text{ }^{\circ}\text{C}$